

SCD-V13.3P

13.3" Android Metal Digital Signage · Wall-Mount Panel

FULL HD 1080p IPS

ANDROID 11

TOUCH OPTIONAL

QUAD-CORE

WI-FI · LAN · BT

SLIM 25.8mm



13.3" A-GRADE IPS PANEL · METAL HOUSING

1920×1080

Full HD IPS, 16:9, normally black

RK3566 1.8 GHz

Quad-core Android 11 board with 4 GB RAM (2 GB optional) + 32 GB storage

Touch Optional

G+G 10-point tempered glass capacitive touch — add it, or run pure signage without it

85°/85°

Wide viewing angles, all directions

250 cd/m²

Luminance · 800:1 contrast ratio

25.8 mm

Slim metal housing · whole size 332.3×206.3×25.8 mm ref.

Why SCD-V13.3P

1

Brilliant Full HD display

13.3" A-grade IPS LCD with 1920×1080 resolution, 800:1 contrast and 85° viewing angles in every direction — sharp, vivid content from anywhere in the room.

2

Touch, only if you need it

An optional G+G 10-point tempered glass capacitive touch panel turns the same display into an interactive screen — or leave it off for pure, reliable signage playback.

3

Connect it your way

Wi-Fi 802.11 b/g/n, 10/100M Ethernet (RJ45) and Bluetooth 4.0, plus USB 2.0/3.0 Host, Micro/Mini USB OTG, TF card slot and 3.5 mm audio for flexible deployment.

4

Built to last, slim to fit

Robust metal housing in black or silver, just 25.8 mm thin, VESA 210×170 mm wall mounting and 0–50°C operating range for compact spaces.



APPLICATION

Made for compact wall-mount signage

With a slim 25.8 mm metal housing and VESA 210×170 mm mount, the SCD-V13.3P fits neatly into clinics, offices, elevators and small-format retail displays — delivering crisp Full HD content around the clock, with touch available when you need it.

Technical Specifications

MODEL
SCD-V13.3P

SYSTEM	
Board	RK3566, quad-core Cortex-A55, 1.8 GHz
RAM	4 GB (2 GB optional)
Storage	32 GB internal memory (16/64 GB optional)
OS	Android 11
Language	Multi-language

DISPLAY	
Panel	13.3" A-grade LCD IPS panel
Resolution	1920 × 1080 (Full HD), 16:9
Active area	332.40 (H) × 206.40 (V) mm
Display mode	Normally black, IPS
Viewing angle	85° / 85° / 85° / 85° (L/R/U/D)
Contrast ratio	800:1 ref.
Luminance	250 cd/m ²


TOUCH & NETWORK	
Touch	Optional — G+G capacitive, 10 points, tempered glass
Wi-Fi	802.11 b/g/n
Ethernet	10/100M Ethernet
Bluetooth	Bluetooth 4.0
PoE	No (optional add-on)

MEDIA PLAYBACK	
Video	MPEG-1/2/4, H.263/H.264, AVI, RMVB, etc., up to 2K
Audio	MP3 / WMA / AAC etc.
Photo	JPEG, PNG etc.

INTERFACE	
USB	USB Host (USB 2.0 ×1, USB 3.0 ×1)
OTG	Micro / Mini USB OTG
Card slot	TF card
HDMI	Output, up to 1080p@60Hz or 4K@30Hz
LAN port	RJ45
Audio jack	3.5 mm earphone + microphone
Power jack	DC power input

BUILD & CUSTOMISATION	
Mounting	Wall mount, VESA 210 × 170 mm
Speakers	2 × 1.5 W
Materials	Metal housing, black / silver
Camera	No (2.1 MP HD face-recognition camera optional)
Working temp.	0°C to +50°C
Warranty	1 year

PRODUCT MEASUREMENTS

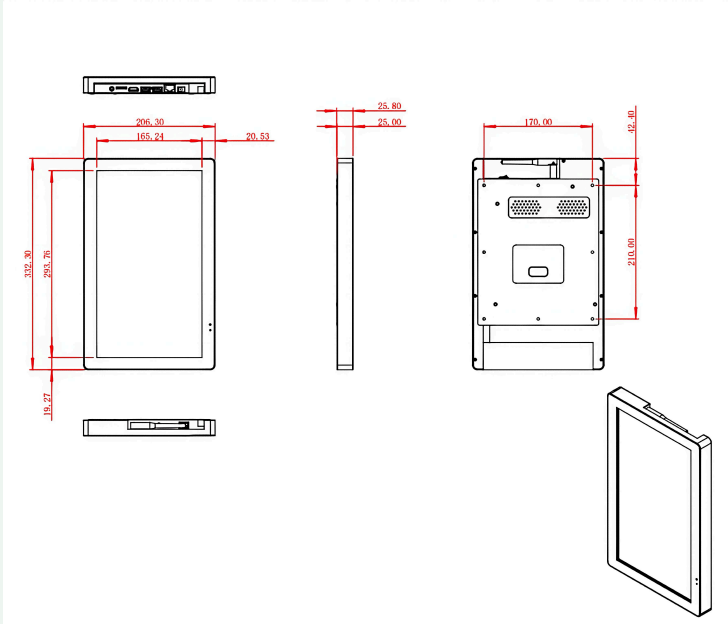

	L	W	H
Unit (no packaging)	332.3 mm	206.3 mm	25.8 mm
Giftbox (packed)	400 mm	290 mm	130 mm
Net weight	2.0 kg unit · 3.0 kg packed		
In the box	Adapter (12V/2A), user manual, warranty card		